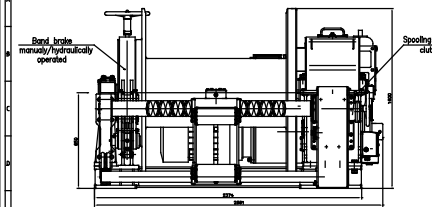

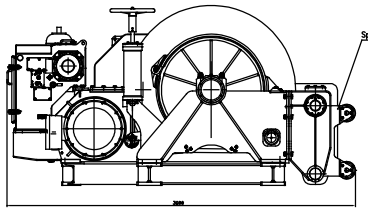

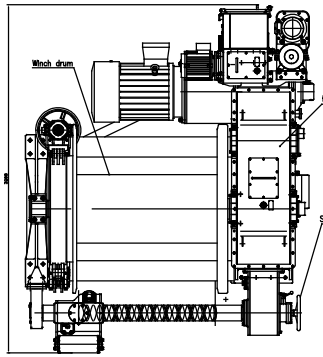

NOTE:
+ TENSION
- PRESSURE

WINCH FOOTPRINT

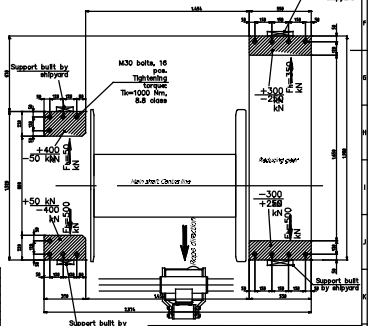

MAIN TECHNICAL DATA:

MOORING DRUM	
DRUM CAPACITY wheel wire rope	45% / 1850 m in 19 layers
DRIVE	E-motor, 450kW, 3x690V, 60Hz
LOW SPEED RANGE (m/min) 1st layer	0 – 18,7 m/min
HIGH SPEED RANGE (m/min) 1st layer	18,7 – 33,1 m/min
PULL at LOW SPEED RANGE 1st layer (kN)	359 kN
PULL at HIGH SPEED RANGE 1st layer (kN)	198 kN
MAX PULL at LOW SPEED RANGE 1st layer	785 kN
MAX BRAKE HOLDING LOAD (kN), 1st layer	769 kN
WEIGHT OF WINCH (kg)	~ 8,3 ton



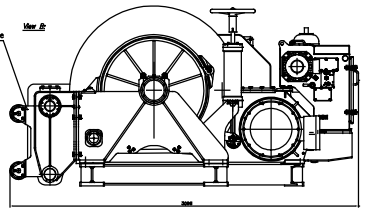

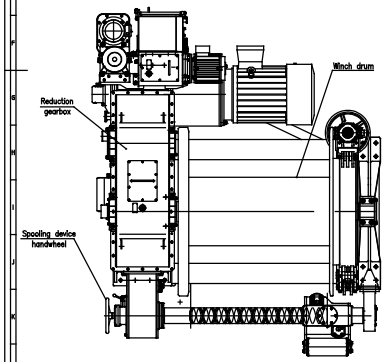

NOTE:
+ TENSION
- PRESSURE

WINCH FOOTPRINT

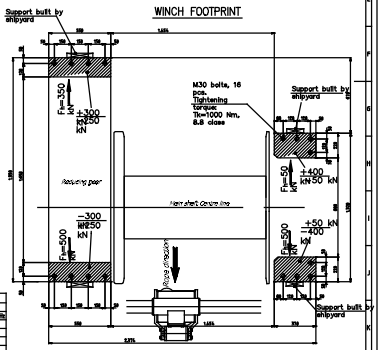

MAIN TECHNICAL DATA:

MOORING DRUM	
DRUM CAPACITY wheel wire rope	45% / 1850 m in 19 layers
DRIVE	E-motor, 450kW, 3x690V, 60Hz
LOW SPEED RANGE (m/min) 1st layer	0 – 18,7 m/min
HIGH SPEED RANGE (m/min) 1st layer	18,7 – 33,1 m/min
PULL at LOW SPEED RANGE 1st layer (kN)	359 kN
PULL at HIGH SPEED RANGE 1st layer (kN)	198 kN
MAX PULL at LOW SPEED RANGE 1st layer	785 kN
MAX BRAKE HOLDING LOAD (kN), 1st layer	769 kN
WEIGHT OF WINCH (kg)	~ 8,3 ton